

FX Extra High Range

for supporting heat pumps, condensers, pipe and cable trays



100% UK Manufacture
100% UK Sourced Materials



The New FX Extra High range has been designed to support your Air Conditioning and Heat Recovery units at least 150mm off surface level, without the need of buying a full framework solution

The FX 500 High & FX 600 High are moulded as a complete unit. For ease of manoeuvrability, the FX 1metre High has been designed as a Step Block, that conforms in shape to our standard FX 1m


The feet can have either a 41mm x 21mm 'glued' in pre galvanised steel channel or our new 'moulded in' aluminium t-bar channel, which is recessed into the top face allowing you to use standard strut fixings to secure your services to the feet

Our FX Range of products are made from Recycled SBR Rubber, making them ECO friendly. They also have the added advantage of vibration & noise absorption which makes them the ideal product for roof or ground level installations



All of our channels are 100% compatible with standard fixtures and fittings

All our FX Feet have hollowed out undersides to assist perfect positioning on pebbled or gravel surfaces

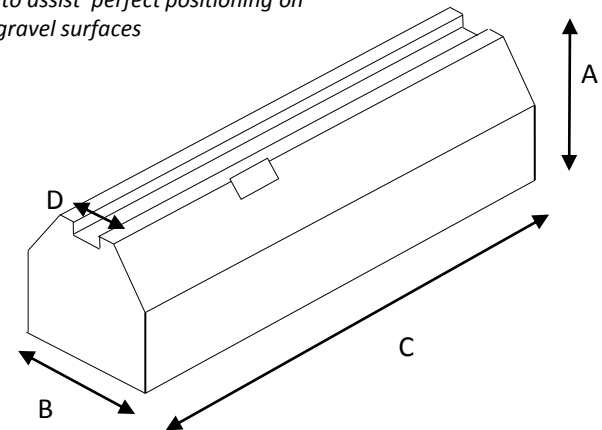

Product Code	Model	Height (mm)	Width (mm)	Length (mm)	Max. Loading per foot (kg)	FX Weight (kg)	FX Weight (kg)
		A	B	C		STEEL	ALI
COMBI 10	FX 500 High	150	160	530	400	9	8
COMBI 12	FX 600 High	200	230	610	450	18.2	17.8
COMBI 13	FX 1000	100	183	1000	645	12.9	11.4
COMBI 41	FX 1m Step Block	100	190	1015	-	14	14

MATERIAL SPECIFICATION

The rubber is milled, sieved & graded Styrene Butadiene rubber (Black SBR) in reclaimed truck/lorry tyre shred & granular form. Bound together using a 8% ratio of moisture curing Polyurethane Pre-Polymer UV Resistant Recycled Rubber
Working Temperature Range: -35°C to +80°C
All dimensions +/- 2mm. Weight per unit +/- 3%